



LANDA[®]
PRESSURE WASHERS


Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

EHW

All-Electric Hot Water Pressure Washer

- Up to 4.2 GPM, 3000 PSI
- Industrial-Grade, 6-7.5 HP Baldor Motor
- Belt-Drive Landa Pump with 5-Year Warranty
- Stainless Steel Coil

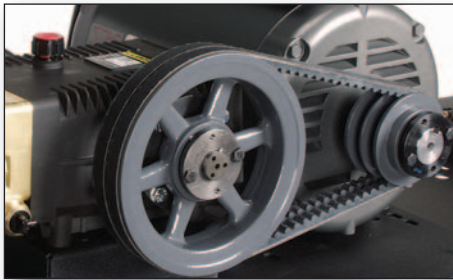

▲ Industrial-strength **Motor** with thermal overload protection and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; 2 notched "V" cogged belts, which operate cooler, connect the motor to the rugged **High-Pressure Landa Pump** with three ceramic plungers and forged brass head with five-year warranty.

■ Motor and pump are mounted on a **Power Platform** with four vibration isolators to minimize shaking and stress on the frame.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for operator convenience and owner protection.

■ Industrial-duty **Magnetic Motor Starter** for long life of reliable starting.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

■ 50 ft. of double-wire braid **High Pressure Hose** rated for up to 5800 PSI and with 24-inch **Hose Guard** for burst protection and swivel **Crimp Fitting** for tangle-free handling of hose and trigger gun

■ Four quick-coupler **Nozzles** are made of hardened stainless steel and mounted for ready access.



■ With the switch in the 'ON' position, the **Auto Start** function allows the unit to be turned on with the pull of the trigger for convenient remote operation.

■ Heavy-duty **Upper Cabinet** is made of stainless steel, including base plate and easy-to-remove cover; **Lower Cabinet** is made of 10 gauge steel protected by an epoxy powder coat finish.

■ High-efficiency **Heating Elements** do not come in contact with the pressurized water, resulting in reduced scale build up, lower maintenance, and longer life.

■ Safety **Low-Water Flow Switch** protects heating elements from burn out due to lack of water.

■ Easy-to-attach **detergent Injector** for easy application of soap

■ Water is heated in a **Stainless Steel Coil** submerged in a tank of water solution for efficient heat transfer and instant hot water with the pull of the trigger; a **Layer of Oil** rests on the surface of the tank water solution for additional retention of heat and to prevent evaporation.

■ **Inlet Filter** strainer protects pump from debris.



www.landa.com



LANDA[®]
PRESSURE WASHERS

Since 1969

North America's **LARGEST** Manufacturer
of Industrial **PRESSURE WASHERS**

EHW

All-Electric Hot Water Pressure Washer

- Up to 4.2 GPM, 3000 PSI
- Industrial-Grade, 6-7.5 HP Baldor Motor
- Belt-Drive Landa Pump with 5-Year Warranty
- Stainless Steel Coil



The EHW, with its auto start-stop feature, can generate a high-pressure, hot water spray on demand simply by pulling the trigger on the gun.

WHY CHOOSE LANDA'S EHW

The EHW is the ideal hot water pressure washer for in-plant cleaning. Just plug it in and get instant hot water...no noise, no fumes. It can be located under a stairway or even inside a closet. And, with the auto stop-start feature, that comes standard with the EHW, the hot water spray can be generated on demand by simply pulling the spring-loaded trigger on the insulated gun.

QUALITY: Packed with *LANDA* quality throughout, the EHW features a heating coil made of stainless steel tubing. A rugged Baldor motor drives the industrial-duty Landa pump, with 5-year warranty, using a high-quality, cast-iron pulley assembly. They are housed in a stainless steel cabinet and mounted on a power platform supported by four vibration isolators, which minimize stress on the frame and extend the life of the equipment. Landa is a ISO-9001 quality certified manufacturer.

FUNCTIONALITY: The EHW features a unique design for heating the water. For instance, energy-efficient heating elements do not come in contact with the pressurized water, which minimizes scale build up, which can shorten the life of the elements. Also, the heating coil is submerged in a tank filled with a water solution formulated for maximum heat transfer. A layer of oil sets on the surface of the solution for heat retention and to prevent evaporation.

SAFETY: The EHW complies to the rigid UL-1776 safety standards with many safety features including thermal protection on both the motor and pump, 24-inch hose guard for burst protection, auto start/stop to prevent damage from operator neglect and tri-lingual operating instructions.

EHW Specifications

Part No.	GPM	PSI	Motor HP	Electrical	Amps	Pump RPM	L x W x H	SHIP WT.	FULL WT.*
EHW4-20024C	4.2	2000	6	460V 3ph	67	900	32" x 24" x 52"	265 lbs.	575 lbs.
EHW4-30024C	3.5	3000	7.5	460V 3ph	72	800	32" x 24" x 52"	265 lbs.	600 lbs.

* Full Weight is when the tank is full of its water solution. Units are shipped dry.



Distributed by:

OPTIONS:

Part No.	Description
4-02755030	E-Zee Reel Hose Reel, 100 ft. (easily mounts to wall)

www.landa.com