

Magnetic Starters

Cutler-Hammer



- Cutler-Hammer quality
- Highest HP rating in a compact space saving design
- Long-life twin break, silver cadmium oxide contacts provide superior resistance to welding and arc erosion
- Din rail mounting

Part No.	Model No.	Frame	Coil Voltage	HP @ 115V 1 PH	HP @ 230V 1 PH	HP @ 230V 3 PH	HP @ 380V 3 PH	HP @ 460V 3 PH
6-4003	CH CE15BNS3TB	B	24V	.05	1.0	2.0	5.0	5.0
6-4000	CH CE15BNS3AB	B	120V	.05	1.0	2.0	5.0	5.0
6-4001	CH CE15BNS3BB	B	240V	.05	1.0	2.0	5.0	5.0
6-4002	CH CE15BNS3CB	B	480V	.05	1.0	2.0	5.0	5.0
6-4006	CH CE15CNS3TB	C	24V	.05	2.0	3.0	5.0	7.5
6-4004	CH CE15CNS3AB	C	120V	.05	2.0	3.0	5.0	7.5
6-4005	CH CE15CNS3BB	C	240V	.05	2.0	3.0	5.0	7.5
6-4007	CH CE15DNS3AB	D	120V	1.0	3.0	5.0	10.0	10.0
6-4008	CH CE15DNS3BB	D	240V	1.0	3.0	5.0	10.0	10.0
6-4009	CH CE15DNS3CB	D	480V	1.0	3.0	5.0	10.0	10.0
6-4024	CH CE15DNS3DB	D	600V	1.0	3.0	5.0	10.0	10.0
6-4012	CH CE15ENS3TB	E	24V	2.0	3.0	7.5	10.0	15.0
6-4010	CH CE15ENS3AB	E	120V	2.0	3.0	7.5	10.0	15.0
6-4011	CH CE15ENS3BB	E	240V	2.0	3.0	7.5	10.0	15.0
6-4015	CH CE15FNS3TB	F	24V	2.0	5.0	10.0	15.0	20.0
6-4013	CH CE15FNS3AB	F	120V	2.0	5.0	10.0	15.0	20.0
6-4014	CH CE15FNS3BB	F	240V	2.0	5.0	10.0	15.0	20.0
6-4016	CH CE15FNS3HB	F	277V	2.0	5.0	10.0	15.0	20.0
6-4017	CH CE15FNS3CB	F	480V	2.0	5.0	10.0	15.0	20.0
6-4020	CH CE15HNS3TB-09	H	24V	3.0	7.5	15.0	25.0	30.0
6-4018	CH CE15HNS3AB-09	H	120V	3.0	7.5	15.0	25.0	30.0
6-4019	CH CE15HNS3BB-09	H	240V	3.0	7.5	15.0	25.0	30.0
6-4021	CH CE15JNS3AB-09	J	120V	5.0	10.0	20.0	30.0	40.0
6-4022	CH CE15JNS3BB-09	J	240V	5.0	10.0	20.0	30.0	40.0

Overload Relays

Cutler-Hammer



- Cutler-Hammer quality
- Direct heated bimetal elements
- Adjustable trip current, overload trip indication
- Manual/automatic reset
- Din rail mounting

Part No.	Model No.	Frame Compatibility	Amps
6-5000	CH C316FNA3E	A-F	0.63-1.00
6-5002	CH C316FNA3G	A-F	1.30-1.80
6-5003	CH C316FNA3H	A-F	1.70-2.40
6-5004	CH C316FNA3J	A-F	2.20-3.10
6-5005	CH C316FNA3K	A-F	2.80-4.00
6-5006	CH C316FNA3L	A-F	3.50-5.00
6-5007	CH C316FNA3M	A-F	4.50-6.50
6-5008	CH C316FNA3N	A-F	6.00-8.50
6-5009	CH C316FNA3P	A-F	7.50-11.00
6-5010	CH C316FNA3Q	A-F	10.00-14.00
6-5011	CH C316FNA3R	A-F	13.00-19.00
6-5012	CH C316FNA3S	A-F	18.00-24.00
6-5013	CH C316FNA3T	A-F	24.00-32.00
6-5014	CH C316KNA3B	G-K	22.00-32.00
6-5015	CH C316KNA3C	G-K	29.00-42.00
6-5016	CH C316KNA3D	G-K	36.00-52.00
6-5018	CH C316KNA3E	G-K	45.00-63.00

Push Button & Contact Blocks

Cutler-Hammer



6-2000

- Cutler-Hammer quality
- Heavy-duty
- Water tight/oil tight



6-2021



6-2022



6-2023

Part No.	Model No.	Description
6-2004	CH C320KGS3	Contact Block, N/O, N/C
6-2000	CH E22B1	Contact Block, N/C
6-2001	CH E22B2	Contact Block, N/O
6-2021	CH E22PB3	Switch, Green Push Button
6-2022	CH E22EB2	Switch, Red Push Button
6-2023	CH E22VB51	Switch, 2-position Lever
6-2020	CH E22YED215	Switch, Red Lever

LANDA Flow Switch



- Horizontal or vertical mount
- 4350 psi max.
- 8 GPM max flow, 1.8 GPM min flow
- 180°F max temp
- 12-250V, .8 Amps
- 3/8" FPT inlet/outlet

6-021730

Part No.	Description
6-021730	LANDA MV60, Yellow
6-021740	Replacement Reed Switch

AP 500 Flow Switch



Vertical mounting or versatile mounting.



- Tough, impact-resistant, glass-reinforced, nylon housing
- Tungsten contact reed switch
- Heavy-duty machine brass internals

- Viton seals
- For solenoid control only
- 1-8 GPM max flow
- 4350 psi max pressure
- 3/8" Inlet / Outlet
- 190°F max temperature
- 1 Amp switch
- 2 Wire Reed

Part No.	Description
410305A	Vertical Mount Only
410308A	Mount in Any Position (Red)
109672	Reed Switch Only (2 wire)

Flow Switch



Spring return float allows full mounting versatility.



- 4050 max pressure
- 3500 rated pressure
- Horizontal or vertical mount
- Forged brass body
- NEW 3-wire reed switch
- 3/8" MPT inlet/outlet
- 8 GPM max flow
- 190°F max temperature
- One Amp switch
- Solenoid control

Part No.	Description
410307P	Flow Switch
109672	Reed Switch Only (2 wire)

Flow Switch



- Brass body
- 8 GPM max flow
- 3500 psi max pressure
- 3 Amp reed switch
- 180°F max temperature
- 3/8" inlet & outlet ports

Part No.	Landa No.	Description
410305	6-02173	ST-5 – Vertical Mount Only
410306	6-02175	ST-6 – Horizontal or Vertical Mount
109672		Reed Switch (AP) (2 wire)
109672S	6-02174	Suttner Reed Switch

Phoenix Flow Switch w/ Pilot



- .75-16.0 GPM max flow
- 4000 psi max pressure
- 165°F max temperature
- 3 Amp-250 Volts
- 96" Reed Cord
- Includes 8mm Pilot
- 3/8" F inlet/outlet
- 2.5 lbs
- Mounting Hole

Part No.	Description
410320	Switch with Pilot
410322	Reed Switch

VAC Switch - Burner Control

Normally open (NO) switch closes when pump vacuum begins drawing water and opens when vacuum is broken due to pump shut down or empty water tank.



- 1/4 FPT connect
- Heavy-duty 16 Amp contacts
- 140°F max water temperature

Part No.	Description
413031	1.5" (HG) Vac Switch
413032	2.5" (HG) Vac Switch
413034	4.5" (HG) Vac Switch

Vacuum Switch

Senses loss of vacuum to shut off burner and/or prevent dry pump operation.



- 1/4" FPT - 10 Amp switch

Part No.	Description
413001	Electric Motor (1.5" Hg) (less than 20" lift)
413007	Electric Motor (2.5" Hg) (less than 34" lift)
413017	Gasoline Eng (4.5" Hg) (less than 60" lift)

Pressure Switch



Operation without opening switch case – Blue = Common
CONNECT: Red/Blue = N/C, Blue/Brown = N/O



- 200°F max temperature
- Stainless steel plunger
- 3600 psi max pressure
- 1/4" MPT nipple
- 15 Amp – 115 or 230V AC
- 3-wire – Internally wired for either N/O or N/C

Part No.	Description
411060	Pressure Switch (Switches@360 psi)
411060-40	Pressure Switch (Switches@580 psi)
082022	Micro Switch (10 Amp 28VDC)
082023	Micro Switch (15 Amp 115/230VAC)

NOTE: 10 AMP 28 VDC Micro Switch available. Excellent for use on 12 VDC Hot Pressure Washers.

Compact Pressure Switch

Three Amp rating provides the switching power to control fuel solenoids just like the large switches. Body measures 1" x 1-1/4" x 2" (Not including wire or connector)



- 3600 psi max rating
- 580 psi switch pressure
- 200°F max temperature
- 1/4" brass MPT connect SS plunger
- 3 Amp switch rating – 250V
- 48" – 3-wire cable for use in either NC or NO application: Blue = Common Brown = NO; Red = NC

Part No.	Description
----------	-------------

411050	Compact Pressure Switch
--------	-------------------------

Red Pressure Switch



- All stainless steel construction
- Rated pressure: 5800 psi
- 6500 psi max pressure
- 640 psi switching pressure
- 195°F max temperature
- 3/8" male inlet
- 15 Amp max draw
- Weight 10 oz

Part No.	Description
----------	-------------

411065	Red Pressure Switch
111459	Heavy-duty MicroSwitch

Toggle / Push Button Switch



- 7/16" mounting bushing
- 1/2" diameter mounting hole required
- Mounting hardware included

Part No.	Description	HP*	Connects
----------	-------------	-----	----------

411605*	SPST, 20A/110V	1.0	m/spade
411607	DPST, 20A/110V		m/spade
337206*	DPST, 20A/125V	1.5	screw
337205*	DPST, 20A/250V	2.0	screw
337208*	DPST, 16A/125V	1.0	screw
285140*	SPST, 20A/120V	3/4	m/spade
285189*	DPST, 20A/120V	3/4	screw
337207	Switch Guard		

Push Button Switches

285139	SPST, 5A/120V Push on/ push off		screw
285187	SPST, 15A/120V Push and hold on/ release off		screw

*Motor rated

Rocker Switches



- On/off switch
- Lighted available
- 125/250V

Part No.	Description	AMP	Voltage
----------	-------------	-----	---------

6-020251	Curvette, V. Carling	16/10	125/250
6-020252	Curvette, 2-pos	20/15	125/250
6-020253	Curvette, 3-pos	16/10	125/250
6-020240	Carling, Green Light, 2-pos	15/10	125/250
6-020241	Carling, Red Light, 3-pos	15/10	125/250

Accura High Limit Switch



- Operates as safety device to shut off burner to prevent machine (water) overheating flashing to steam
- Does not turn back on until water has cooled 50° - 70°F
- Normally used with other adjustable or fixed range thermostat which regulates water temperature
- 15 Amp @110V/10 Amp @ 220V
- Heavy-duty brass housing (7000 psi collapse rating)
- UL - CSA rated, bimetal switch components
- 1/4 male spade lug terminals
- 1/2" MPT external thread connects for attaching conduit or PVC wire connectors

Part No.	Probe MPT	Temperature
----------	-----------	-------------

411250	3/8"	110°F
411254	3/8"	120°F
411256	3/8"	140°F
411262	3/8"	170°F
411266	3/8"	180°F
411272	3/8"	210°F
411276	3/8"	230°F

411264	1/2"	180°F
411268	1/2"	200°F
411270	1/2"	210°F
411232	1/2"	230°F
411278	1/2"	250°F
411332	1/2"	330°F

141538	1/2"	PVC Coupler
--------	------	-------------

Accura High Limit Switch w/ Wire Lead



- Operates as safety device to shut off burner to prevent machine (water) overheating flashing to steam
- Does not turn back on until water has cooled 50° - 70°F
- Normally used with other adjustable or fixed range thermostat which regulates water temperature
- 15 Amp @110V/10 Amp @ 220V
- Heavy-duty brass housing (7000 psi collapse rating)
- UL - CSA rated, bimetal switch components
- 1/4 male spade lug terminals
- 1/2" MPT external thread connects for attaching conduit or PVC wire connectors

Part No.	Landa No.	Probe MPT	Wire Lead	Temperature
----------	-----------	-----------	-----------	-------------

411274		1/2"	36"	210°F
411231	4-0509	1/2"	42"	230°F
4-0510		1/2"	42"	275°F
411233		1/2"	80"	230°F
411331	4-05010	1/2"	80"	330°F

Ground Fault Circuit Interrupters (GFCI)

GFCI's protect people and equipment by interrupting potentially lethal ground circuits exceeding 6mA. The dangers of electrical shocks have been long known – GFCI's are the only real way to be safe. Most city & county codes now require GFCI protection on power cleaning equipment.



- U.L. listed
- Three wire circuits
- Transient voltage protection
- 4 - 6mA ground fault protection
- Grounded neutral protection
- Mechanical trip indicator
- Compact size
- Rugged construction
- Radio frequency interference suppression

Part No.	Landa No.	Volt	Amp	Length	Plug included
6-01062		120V	15A	36 ft	yes
337626		120V	15A	12 ft	yes
337607		120V	20A	12 ft	no
337608		120V	20A	12 ft	yes
337609	6-01060	120V	20A	35 ft	yes
337627		220V	15A	6 ft	yes
337630		240V	15A	12 ft	yes
6-010631		240V	20A	36 ft	yes
337632		240V	30A	6 ft	yes
337645		240V	30A	6 ft	no
337647		240V	30A	12 ft	no
337634		240V	30A	12 ft	yes
337649		240V	30A	35 ft	no
337635	6-01059	240V	30A	35 ft	yes
6-010690		240V	40A	36 ft	no
GFCI Plug without Cord					
337615	6-01061	120V	15A	N/A	yes
337614		120V	20A	N/A	yes

NOTE: User-attached plug also includes the sealant necessary to attach the power cord per UL Specification.

GFCI Module 20 Amp - 120V or 240V

Not recommended for field service.



- Using 120V or 240V shop attachable module; attach your power cord length as required
- Use with 16–12 gauge SJ, SJO or SJT 3-wire cords
- 20 Amp rating at 120V or 240V 60 Hz

Part No.	Landa No.	Description
337642	6-01063	GFCI Module

Enclosure Box for Magnetic Motor Starter Sets



- NEMA 65 non-metallic enclosure Dim: 4-1/3" W, 4" D x 6" H
- 8 (1/2-3/4") wiring knockouts on box
- Holes pre-drilled for mounting contactor and overloads with mounting screws included

Part No.	Description
260268X	Box, Toggle & Hardware

Magnetic Motor Starters

For pressure washer and carwash applications.



Contactor



Overload



Coil

- 24VAC Control
- 1Ø - 240V, 3Ø - 240V or 480V Contactor
- Componentized for flexibility
- Thermal overloads adjustable within range shown
- Electrical life: 1,000,000+ cycles
- Mechanical life: 20,000,000+ cycles
- Contacts: 90% silver, 10% cad-oxide

Type	24V Coil	120V Coil	220V Coil	FL Amp	220V 1Ø HP	220V 3Ø HP	440V 3Ø HP
Contactors							
				UL Rating			
A	260265	260290	260295	22	2	3	5
B	260266	260291	260296	24	2	5	7.5
C	260267	260292	260297	32	3	5	10
D	260268	260293	260298	40	5	7.5	15
E	260269	260294	260299	52	7.5	10	20
F	260351	260352	260353	90	10	15	30

Part No.	Voltage	Fits Contactor
Coils Only		
260274	24V	A,B,C,D
260272	120V	A,B,C,D
260273	220V	A,B,C,D
260275	480V	A,B,C,D
260277	120V	E
260278	220V	E
260427	120V	F
260428	220V	F

Part No.	Type	Amp Range	Fits Contactor
Thermal Overloads			
260253	Man	9.0-15	A,B,C,D
260270	Man	14-23	A,B,C,D
260271	Man	17-26	A,B,C,D
260247	Man	20-33	C,D
260248	Man	28-42	C,D
260249	Man	35-50	E,F
260433AUTO	Auto	2.0-3.3	A,B,C,D
260435AUTO	Auto	3.0-5.0	A,B,C,D
260437AUTO	Auto	4.5-7.5	A,B,C,D
260440AUTO	Auto	6.0-10	A,B,C,D
260253AUTO	Auto	9.0-15	A,B,C,D
260270AUTO	Auto	14-23	A,B,C,D
260271AUTO	Auto	17-26	A,B,C,D
260247AUTO	Auto	20-33	C,D
260248AUTO	Auto	28-42	C,D
260249AUTO	Auto	35-50	E,F

- Used to mount Overload to Motor Starter Contactors

Part No.	Description
Thermal Overload Connector Kits	
260281	A,B,C,D
260284	E
260349	F

On / Off Rotary Switch



6-020201

- Single or three phase
- 2 position or 3 position
- Heavy-duty

Part No.	Description
6-020201	115-230V, 1PH 3-position
6-020203	230/460V, 3PH 3-position
6-020204	120-600V, 1-3PH 2-position

Machine Control Cam Switch - 3 Position



- Heavy-duty rotary cam switches
- Legend plate reads Off/Pump/Burner
- Quick Make/Break action reduces arcing
- Wiring boot included (except 410242-3)
- Legend plate 2-1/2" square
- Four-screw mounting

Part No.	Model	Amp	Voltage	Phase
410210	S220-1686	20	110V	1Ø
410221	S220-1687	20	220V	1Ø
410223	S220-1688	20	220V	3Ø
410231	S225-1686	30	110V	1Ø
410232	S225-1687	30	220V	1Ø
410233	S225-1688	30	220V	3Ø
410242	S432-4095	40	240V	1Ø
410243	S432-1402	40	480V	3Ø

Single Hole Mounting - requires 1 22mm (7/8" Dia) hole

410208	220-1789	20	110V	1Ø
--------	----------	----	------	----

"Big Boot" Cam Switch - 3 Position

Large rectangular boot for easier wiring.



- Mounting configuration and electrical ratings same as "S" switches above

Part No.	Model	Amp	Voltage	Phase
410250	T220-1686	20	110V	1Ø
410252	T220-1687	20	240V	1Ø
410260	T225-1686	30	110V	1Ø
410262	T225-1687	30	240V	1Ø
410265	T225-1688	30	240V	3Ø

Single Hole Mounting - requires 1 22mm (7/8" Dia) hole

410219	220-1843	20	220V	1Ø
--------	----------	----	------	----

On / Off Cam Switch



- Legend plate: On/Off
- Tear drop-shaped knob
- Face plate 2-1/2" square
- Motor Ratings:
410202 – 1-1/2 HP/ 110V
410204 – 6 HP/ 240V

Part No.	Description
410202	20 Amp/ 110 Volt
410204	28 Amp/ 240 Volt

Universal "Elektra"

UL/CSA Rated Machine control cam switches



410251



410253



410263

- Position - "Off" - "Pump Burner"
- Quick make/break action - reduces arcing
- 2 or 4 screw mount (2-1/2 square legend plate)
- (Matches: Salzer/Kraus -Naimer/ Bremas & Klockner - Moeller mounts)
- "Boot" has plenty of wiring room
- Screw to screw/terminal to terminal replacement for salzer "S" & "J" type switches above
- "Tite Boot" excellent dust & moisture seal
- Contacts UL/CSA Rated: 25 Amp vs 20 Amp, 35 Amp vs 30 Amp, 50 Amp vs 40 Amp

Part No.	Amp	Wiring Poles	Phase	Voltage	HP
410251	25	1	1	120	1.5
410253	25	2	1	120/240	1.5/2.0
410263	35	2	1	120/240	2/3
410267	50	2	1	120/240	3/7.5

NOTE: None of the ELEKTRA switches are for use on 3 phase motors without adding fuses or thermal overload.



"Elektra" On - Off Switch with box UL/CSA Rated 25 & 35 Amp. Compact 3-1/4" Square x 3-3/4" Deep Enclosure "Versatile Mount".

Part No.	AMP	Wiring Poles	Phase	Voltage	HP
410203	25A	2	1	120/240	1.5/2
410205	35	2	1	120/240	2/3

NOTE: None of the ELEKTRA switches are for use on 3 phase motors without adding fuses or thermal overload.

60 AMP On / Off Cam Switch & Box

Cam Action Fast "Make-Break" to reduce arcing.



- 60 Amp disconnect rating
- Four 1/2" knock-outs
- Versatile mounting
- Motor Ratings:
7.5 HP @ 240vt 1Ø
5.0 HP @ 240vt 3Ø
30 HP @ 480vt 3Ø

Part No.	Description
410206	60 Amp Switch w/ Large Box 4-1/2" w x 7" H x 3-3/4" D
410190	60 Amp Switch only
410192	Box only 3-7/8" x 4-7/8" x 2-3/4" for 410190 switch using 10 gage/smaller wire
076521	Knob

NOTE: Switch does not have thermal overload protection

30 AMP Toggle Switch



- 30 Amp 600 Volt - DPST
- With or without box
- Rated for:
2 HP motor @ 115V
3 HP Motor @ 230V

Part No.	Description
337187	Switch only
337188	Switch & Rain Tight Box
337210*	Switch w/ NEMA 1 Box

*Not Rain Tight (Baldor Replacement)

Manual Motor Starter w/ Sealed Box



- 25 Amp with adjustable overload
- Adjustment range 20-25 Amps
- Sealed box 3-1/4"W x 3-1/2"D x 6-1/2"H
- 110-500 Volt IEC rated
- 2 cord grips fit 1/2" threaded knockouts
- Protective cover over buttons
- Single & 3-phase wiring instructions

Part No.	Description
337212	Motor Starter

Winco AC Generator



2000 Watt, 120 VT, 3600 RPM, 16.7 Amp.

- Industrial-duty – 3 carbon brushes
- The STANDARD in the pressure washing industry: WINCO 2FSM2PC-1
- Starts & runs 1/2 HP motor
- 5/8" diameter shaft rotates either direction
- Extra slip ring for smoother power curve during motor starting
- Dual sealed permanent bearings
- 15" L x 6.5" W x 6.75" H
- 59 lbs weight

Part No.	Landa No.	Description
337440	6-0601	Winco AC Generator

- Genuine Winco parts
- Save downtime—we stock below items & more!

Part No.	Landa No.	Description	No. Req'd
Winco Repair Parts			
078451		Bearings	2
078452	6-0605	Brushes	3
078454	6-0607	Capacitors	2
078455	6-0608	Rectifier	1
078457		Receptacle	2
078459		Fan	1

Voltmaster Generator

2500 Watt/120V/21.6 Amp @ 3600 RPM.



- Industrial-type watertight enclosure (11-5/8" x 7-1/2" diameter)
- Brushless design
- All copper winding – High surge capacity
- Circuit breaker protection (standard)
- Shaft rotates either direction
- 7/8" shaft, 2 sealed (ball) bearings
- 36.5 lbs weight
- Adapter plate for replacement of Winco model 2FS2PC-1 available

Part No.	Description
337441	2500 Watt Generator
337443	Adapter Plate & Fasteners

Voltage Regulator



- Designed specifically for LANDA for use on 12VDC burner systems.

Part No.	Description
6-0615	25 Amp, 15 Volt

Adjustable Thermostat Switches



- Capillary tube provides fast response time
- Prevents burner from overheating
- Adjustable to 300°F

Part No.	Description
4-05088	300°
4-05090	175°; SJ Units

Adjustable Thermostat



With panel-mount controls.



- 4000 psi max pressure
- 302°F max temperature
- 3-1/2" immersion bulb w/ 60" capillary tube
- Accuracy ± 2.5%
- Temperature change response within ± 6°F
- 16 Amp - 250 volt
- Large easy read dial
- Seal, nut & 1/2" transition coupling included

Part No.	Description
430050	0-194°F Thermostat
430058	0-248°F Thermostat
430060	0-302°F Thermostat

Adjustable Flow Thru Thermostat



076731



430027

- Stainless Steel Case
- Silver Contacts
- Ceramic Insulation
- Stop Collar
- Tension Adjusting Screw
- 3000 psi max pressure
- 10 Amps - 110 Volts
- 5 Amps - 220 Volts
- Adjustable 85° - 250°
- 1/2" inlet / 3/8" outlet
- Fenwall Inside

Part No.	Description
430027	Thermostat
076731	Switch Only

In Line Thermostat

In Line Controls for Pressure Washers and Steamers.



- Positive bimetal temperature control
- 1/2" inlet/outlet FPT ports
- 2000 psi max working pressure
- Universal 1/4" spade terminal connection

Part No.	Description
430025	60-250°F
430035	60-350°F

Solid State Temperature Control



4-05085



- Solid state controls
- Thermistor provide accurate and timely cutoff at proper temperature
- Adjustable up to 350°F

Part No.	Description
4-05085	275°
4-05087	350°
4-05086	Thermistor

Timers



6-03700



6-036880

- Preset and adjustable available
- Heavy-duty

Part No.	Description
6-03700	Multi-function, 24V-120/240V Time Delay Timer
6-036880	Solid State, 120V, 5-60 Minute Adj for Auto Start

Indicator Lights



6-050413



6-020590

- Easily mounts to control panel
- Available in 12V, 24V, and 125V
- Great for remote applications

Part No.	Voltage	Color
6-02053	125V	Red
6-020530	125V	Green
6-050413	125V	Amber
6-0399	24V	Red
6-03990	24V	Green
6-02059	12V	Red
6-020590	12V	Green

Fuses

- Full range of fuses
- Protect your equipment

Part No.	Code	Max Voltage	Amps
6-022970	FNM1/2	250V	.5
6-0229810	FNM8/10	250V	0.8
6-0229710	FNM1	250V	1
6-02320	FNM2-1/2	250V	2.5
6-023080	FNM3	250V	3
6-023090	FNM5	250V	5
6-02321	FNM7	250V	7
6-022910	FNM8	250V	8
6-022920	FNM10	250V	10



6-02311	FNQ3/10	500V	0.3
6-02312	FNQ6/10	500V	0.6
6-02306	FNQ-R-3	600V	3



6-02296	KTK-R1/4	600V	.25
6-02295	KTK-R1/2	480V	0.5
6-02294	KTK-R1	240V	1
6-022982	KTK-R1-1/2	600V	1.5
6-02299	KTK-R2	120V	2
6-022990	KTK-R2-1/2	600V	2.5
6-022992	KTK-R4	600V	4
6-02307	KTK-R5	600V	5
6-02304	KTK-R30	600V	30



6-02297	MDL1/2	120V	0.5
6-022981	MDL3/4	250V	.75
6-022971	MDL1	250V	1
6-02298	MDL2-1/2	24V	2.5
6-02308	MDL3	250V	3
6-02309	MDL5	250V	5
6-02291	MDL7-1/2	250V	7.5
6-022911	MDL8	250V	8

Circuit Breakers


- Provides protection against excessive Amp draw



6-04121

Part No.	Description
6-04121	8 Amp
6-041250	25 Amp (All 12V Systems)

Relays

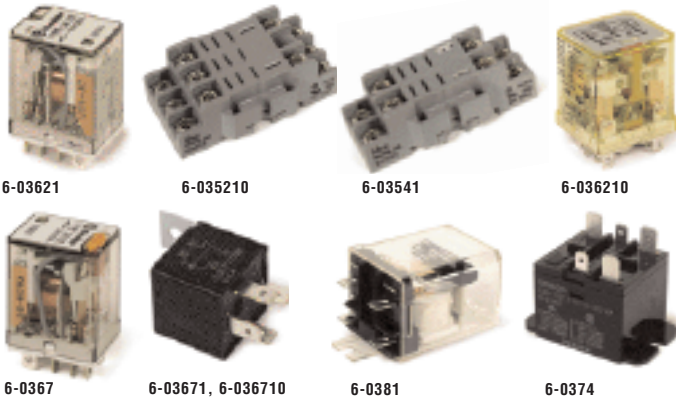

6-03621 6-035210 6-03541 6-036210
 6-0367 6-03671, 6-036710 6-0381 6-0374

Part No.	Description
6-03621	120V, RH2B-UI-AC120 for Pressure Washers
6-03521	240V, RH2B-UI-AC240 for CL, CLP
6-035210	Socket, SH3B05* IDEC for Auto Start/ CLP
6-03541	Base, SH2B-05 for IDEC
6-036210	Latch 2, RH2LBUAC120* IDEC Auto Start/ CLP
6-0367	24V, IDEC CLP
6-0381	Power Deltrol, 120V for SJ-5, CL, WS
6-0374	Relay, Power Omron G4B112T1FDCUSR PAC120 for Delta/Alpha
6-03671	P&B/VF4-41F11, 12VDC, 40 Amp for 12VDC Units 13hp & Below
6-036711	Relay, P&B, 24V/40 A for 12 VDC Units over 13hp

Step-Down Transformers




6-6031 6-60121 6-6035

- Industrial duty
- High quality CutlerHammer
- Drops primary voltage to selected secondary voltage

Part No.	Primary Voltage	Secondary Voltage	Size
6-05234	600V	120-240V	1.0KvA
6-6031	380/400/415	110/220V	.750KvA
6-60121	120/240V	24V	.050KvA
6-6035	120/240V	24V	.100KvA
6-60161	208/230/460V	24/115V	.050KvA
6-60141	208/277V	120V	.050KvA
6-60151	208/277V	120V	.075KvA
6-6025	380V	24V	.050KvA
6-60051	240/480V	120/240V	.200KvA
6-60021	240/480V	120/240V	.500KvA
6-60111	240/480V	120V	.075KvA
6-60101	240/480V	120V	.050KvA
6-60131	550V/575/600V	115V	.050KvA

Junction Boxes

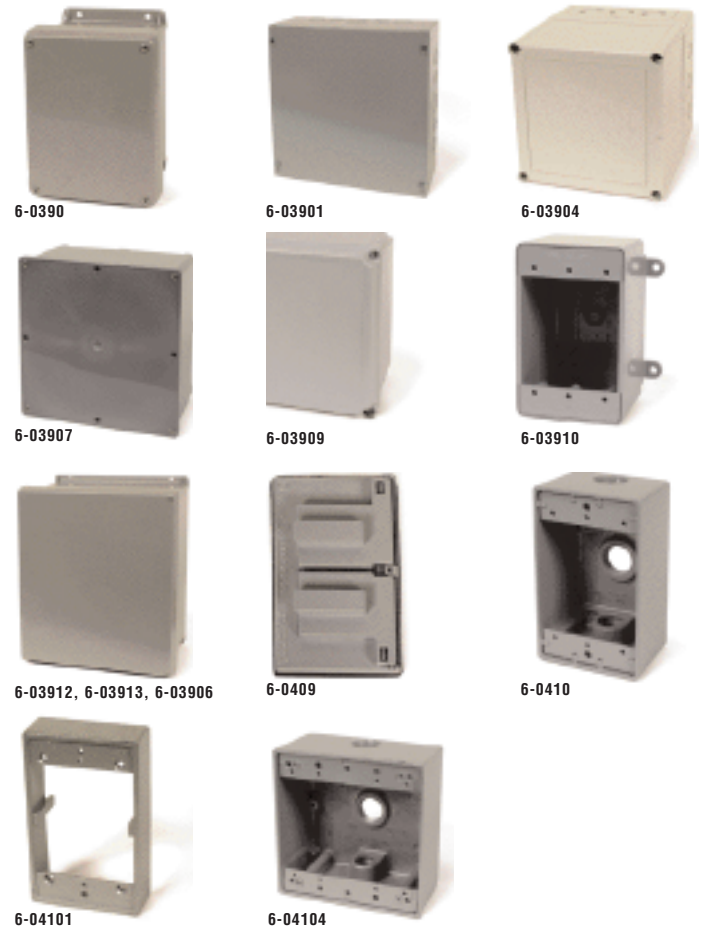

6-0390 6-03901 6-03904
 6-03907 6-03909 6-03910
 6-03912, 6-03913, 6-03906 6-0409 6-0410
 6-04101 6-04104

Part No.	Description
6-0390	VNG Remote, Plastic
6-03901	12" x 12" x 4", Metal VNG Remote Wiring Box
6-03904	Fiberglass, NEMA4 for PE Units
6-03906	12" x 10" x 5.25" for Solid Sep/ Water Blast/ AMC
6-03907	8" x 8" x 4", Plastic Alpha, for SEA 3-1100
6-03909	10" x 8" x 6", Box, Plastic w/ Lid for SEA
6-03910	Box, Plastic w/o Lid E9801
6-03911	Lid, Plastic for 6-03910
6-03912	18" x 16" x 9.25", Plastic for CLP, WB
6-03913	14" x 16" x 6.75", Plastic for CL, HBG, AMC, Delta
6-0409	Cover, Duplex Receptacle for Alpha
6-0410	2" x 4", 3-hole, 1/2" WB, for CLP
6-04101	2" x 4", Extension, for 6-0410, 6-04102, 6-04103
6-04102	2" x 4", 5-hole 1/2" for CLP
6-04103	2" x 4", 4-hole, 1/2" for CLP
6-04104	4" x 4", 3-hole, SK Series for Alpha/ PK
6-041041	4" x 4", 5-hole, 1/2" for WB
6-041043	4" x 4" SK, Cover Plate, for WB for 6-00041
6-0411	2" x 4", Cover Plate, for 6-0410
6-04110	2" x 4", Junction 3-hole, 3/4"
6-041100	2" x 4", 3-hole, 1" for ENG

RainTite Switch Box



- UL 728A
- 2-3/4" x 5-1/2" x 2" box
- Three 1/2" tapped holes
- Box includes 2 plugs, ground screw & mounting lugs
- Cover includes gasket

Part No.	Description
337203	RainTite Switch Box
337204	Switch Box Cover

Strain Reliefs



- 1/2" and 3/4"
- Liquid tite available
- Heavy-duty

Part No.	Land No.	Description
Plastic		
337135	6-05152	1/2", Straight, small
6-05153		1/2", Straight, large
337155	6-05154	1/2", Flexible, 80° to 90°
337159	6-051500	3/4", Flexible, 80° to 90°
337137	6-051595	3/4", Straight
6-051591		1/2" 90°
6-051593		3/4" 90°
6-05159		Straight, 1/2"
6-051592		Straight, 3/4"
6-05181A		Locknut, 1/2"
6-05181B		Locknut, 3/4"
Metal (Romex)		
337020		1/2" Straight
6-05161		3/8" Straight
337021	6-0517	3/4" Straight
6-05181		Locknut, 1/2"
Aluminum		
6-05180		1/2", Straight
6-05220		1", Straight

Cord Caps / Plugs



- Industrial quality
- Dead front cord caps – nylon body straight plugs & "Auto-Clamp" for cord
- 337013 angle plug has vinyl body and both 30A & 50A neutral leg

Part No.	Description
337000	15A/120V, Black Nylon
337004	20A/120V, Black Nylon
337006	20A/250V, Black Nylon
337013	30A-50A/250V, Black Vinyl

Molded Power Cord



- Water tight
- Factory finished look
- Used on skid generator units

Part No.	Description
6-0107	3' 14-3 Cord w/ Plug

Wire Loom - for wiring harnesses



- Protects wires from abrasion and crushing
- Controls bundles of wires and allows for multiple exits at wiring points
- "Factory Perfect" look for all machines

Part No.	Description
337120	1/4" ID 100' Roll
337121	3/8" ID 100' Roll
337122	1/2" ID 100' Roll
337123	5/8" ID 100' Roll

Vinyl Electrical Tape



- Premium grade - 7 mil
- UL approved
- 3/4" x 60'

Part No.	Description
118910	Roll 3/4" x 60'