


**LANDA**<sup>®</sup>  
PRESSURE WASHERS

North America's **LARGEST** Manufacturer  
of Industrial **PRESSURE WASHERS**

# OHW

Portable, Electric-Powered,  
Diesel-Heated, Hot Water Pressure Washer

- Up to 4.2 GPM, 3000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Sch. 80 Heating Coil
- Heavy-Duty Motor
- 120V to 575V

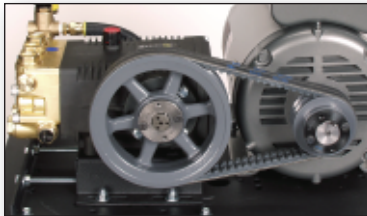

▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; 2 notched "V" cogged belts, which operate cooler, connect the motor to the rugged **High-Pressure Landa Pump** with three ceramic plungers and forged brass head with seven-year warranty.

■ High-efficiency **Burner** is shielded by overhanging cover and features a **Fuel-Water Separator** for fuel pump protection.

■ Conveniently located **Control Panel** with magnetic starter (3 phase models) and anti-syphon detergent valve, which locks out air for precise soap metering.

■ 36 ft. of high-grade electrical cord with **Ground Fault Circuit Interrupter** on single-phase models for operator safety.

■ 50 ft. of steel-wire braid **High Pressure Hose** with 24-inch guard for burst protection.

■ Unique, slide-out **Service Platform** allows for easy access and servicing of pump and unloader.

■ High-heat steel inner wrap surrounds cold-rolled **Heating Coil** made of Schedule 80 steel pipe with five-year warranty.

■ Unique design allows access to the **Coil Wrap** within minutes by simply removing six bolts.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for added liability protection and operator convenience.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.



▲ Optional, E-Zee **Hose Reel** with compact, easy-wind design for tangle-free handling of hose (#4-02755030).



■ Two-ply, tubed **Pneumatic Tires** make for easy maneuvering in any terrain; safety brake prevents rolling.

■ Many **Safety Features**, including a rupture disk and thermal pump protector to prevent the build up of excessive pressures or heat.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.

■ Built-in **Detergent Injector** for easy soap application

■ Rust-free **Float Tank** with stainless steel inlet filter for back-flow protection.

[www.landa.com](http://www.landa.com)



North America's **LARGEST** Manufacturer  
of Industrial **PRESSURE WASHERS**

# OHW

Portable, Electric-Powered,  
Diesel-Heated, Hot Water Pressure Washer

- Up to 4.2 GPM, 3000 PSI
- Belt-Drive Landa Pump with 7-Year Warranty
- Sch. 80 Heating Coil
- Heavy-Duty Motor
- 120V to 575V



## WHY CHOOSE LANDA'S OHW

The OHW is a value-packed line in *LANDA's* popular series of electric-powered, industrial hot water pressure washers with energy-efficient horizontal coils.

**QUALITY:** Packed with *LANDA* quality throughout, the OHW features top-of-the-line, tri-plunger high-pressure Landa Pump with 7-year warranty, Schedule 80 heating coil made of 1/2-inch pipe and a variety of engineering innovations that make this a service tech's dream.

**PORTABILITY:** The OHW is compact and easy to handle. Its leak-free, tubed, pneumatic tires make for easy maneuvering by the operator on any terrain. And its 36 feet of electrical cord provide additional mobility.

**SAFETY:** Certified to the rigid UL-1776 safety standards, the OHW also has many features that make it extremely safe, including motor thermal overload protection, rupture disk attached to the heating coil, thermal pump protector, flow-activated fuel shut-off switch, 24-inch hose guard for burst protection, and Ground Fault Circuit Interrupter on all single-phase models.

### OHW Specifications

| Part No.     | GPM | PSI  | Motor HP | Electrical | Amps | Pump RPM | BTU / Hr | L x W x H           | SHIP WT. |
|--------------|-----|------|----------|------------|------|----------|----------|---------------------|----------|
| OHW3-11024D  | 2.5 | 1000 | 2        | 120V 1 ph  | 20   | 1075     | 235,000  | 48" x 30.5" x 36.5" | 500 lbs. |
| OHW4-20024A  | 4.2 | 2000 | 6.2      | 230V 1ph   | 29   | 935      | 400,000  | 48" x 30.5" x 36.5" | 600 lbs. |
| OHW4-20024B  | 4.2 | 2000 | 6.2      | 230V 3ph   | 19   | 935      | 400,000  | 48" x 30.5" x 36.5" | 600 lbs. |
| OHW4-20024C* | 4.2 | 2000 | 6.2      | 460V 3ph   | 11   | 935      | 400,000  | 48" x 30.5" x 36.5" | 600 lbs. |
| OHW4-30024A  | 3.9 | 3000 | 8.2      | 230V 1ph   | 38   | 715      | 325,000  | 48" x 30.5" x 36.5" | 640 lbs. |
| OHW4-30024B  | 3.9 | 3000 | 8.2      | 230V 3ph   | 28.5 | 715      | 325,000  | 48" x 30.5" x 36.5" | 640 lbs. |
| OHW4-30024C  | 3.9 | 3000 | 8.2      | 460V 3ph   | 18.5 | 715      | 325,000  | 48" x 30.5" x 36.5" | 640 lbs. |
| OHW4-30024F* | 3.9 | 3000 | 8.2      | 575V 3ph   | 17.5 | 715      | 325,000  | 48" x 30.5" x 36.5" | 640 lbs. |

\* Also available are models configured to 208V 1ph and 3ph



Distributed by:

### OPTIONS:

| Part No.   | Description   |
|------------|---|
| 30-410     | Tire upgrade to Mag Wheels (Set of 4)                                       |
| 30-512     | Stainless Steel Outer Coil Wrap   |
| See Dealer | Automatic Start / Stop or Time Delay Shutdown<br>are available upon request |

[www.landa.com](http://www.landa.com)